



Datavideo TLM-702 7" x 2 TFT LCD Monitors



Instruction Manual

<http://www.datavideo-tek.com>

Rev: 131205

Table of contents

Warnings and Precautions	2
Warranty	3
Disposal.....	3
What is in the package	5
Introduction	5
Features	5
Functions	6
Front Panel	6
Rear Panel	7
Specification	8
Service and Support.....	9



Warnings and Precautions

1. Read all of these warnings and save them for later reference.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this unit in or near water.
5. Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord's rating.
10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
11. Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;
 - e. When the product has been dropped or the cabinet has been damaged;
 - f. When the product exhibits a distinct change in performance, indicating a need for service.

Warranty

Datavideo warrants that the equipment it manufactures shall be free from defects in material and workmanship for a period of 12 months from the date of product purchased. If equipment fails due to such defects, Datavideo will, at its option, repair or provide a replacement for the defective part or product.

Equipment that fails after the warranty period, has been operated or installed in a manner other than that specified by Datavideo, or has been subjected to abuse or modification, will be repaired for time and material charges at the Buyer's expense.

This warranty does not affect your statutory rights within the Country of purchase.

Disposal

For EU Customers only - WEEE Marking.



This symbol on the product indicates that it will not be treated as household waste. It must be handed over to the applicable take-back scheme for the recycling of electrical and electronic equipment. For more detailed information about the recycling of this product, please contact your local Datavideo office.

What's in the Package

The following is a packing list, if any items are missing from your box please contact your dealer immediately.

Item	Description	Q'ty
1	TLM-702 (2 x 7" TFT Monitor)	1
2	BNC to BNC 1.2m	2
3	Tally cable (Stereo 3.5mm mini jack) 1.2m	2
4	1.5 ϕ Hex Wrench	1
5	2.5 ϕ Hex Wrench	1
6	AC Power Cord	1
7	AC/DC Switching Adaptor 12V / 2.5A	1
8	Instruction Manual	1

Introduction

The Datavideo TLM-702 is a 19" rack mountable dual 7" TFT Monitor. It is an ideal accessory for the Datavideo SE 500 & SE 800 (with RMC-140 or RMC-90) Vision Mixers, or many other 19" rack mount applications.


The all-metal construction makes the TLM-702 robust and durable, and the 12V power requirements make it easy to power in the field.

The high resolution TFT screens have a wide viewing angle and feature NTSC / PAL auto detection.


Features

- Each monitor has two composite video inputs with bypass outputs
- High resolution TFT Screens - 1440 x 234 dots
- Individual adjustments of Brightness, Contrast, Color and Tint (Tint NTSC only) for each monitor
- Pivoting mount to enable the screens to be angled up or down
- Wide viewing angle - (Vertical) +40/-60 degree, (Horizontal) +60/-60 degree
- Switchable Aspect Ratio - 16:9 / 4:3 selectable
- 2 Color Tally Light (Red and Amber)
- NTSC/PAL compatible (Automatic switching)

Functions - Front Panel

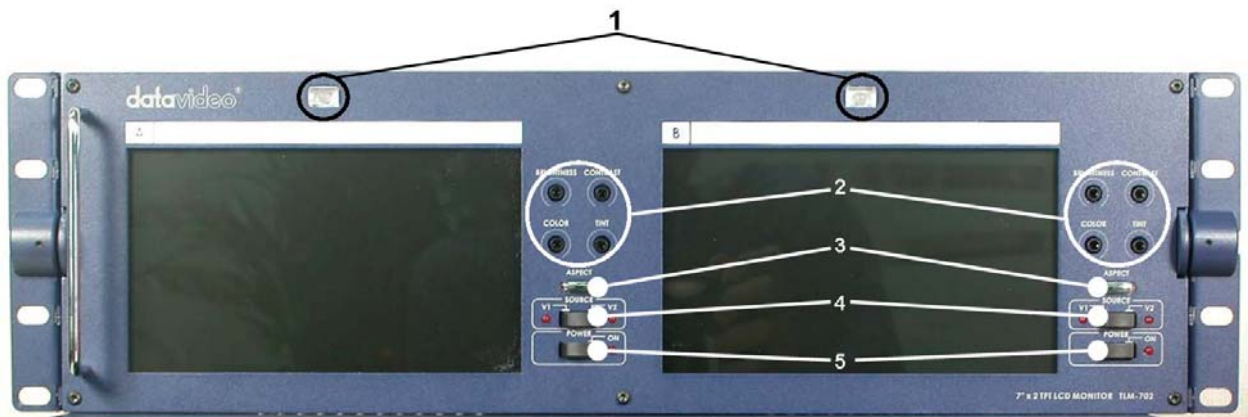

Each monitor has a two color tally light indicator which can be connected to the Datavideo RMC 140, SE500 or similar products. AMBER indicates Cued and RED indicates Live.

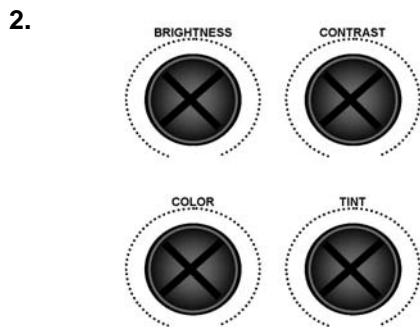


Each Monitor has individual adjustments for Brightness, Contrast, Color and Tint (Tint is for NTSC only).

These four adjustments can be adjusted with a X headed screwdriver.

It is recommended that you use a Test Pattern to adjust the monitors.



The ASPECT button switches the aspect ratio from 16:9 and 4:3.



Source select switches between video input 1 and video input 2. (Each monitor has a choice of two video inputs)






Power On / Off switches the monitor On or Off



On either side of the TLM-702 are small Allen Key screw tension adjustments. These alter the tension on the pivoting mechanism. If you want to change the angle of the monitors, i.e. aim them up or down, you can loosen these screws and adjust the TLM-702. Once you have set the correct angle tighten the screws back up.

Functions - Rear Panel

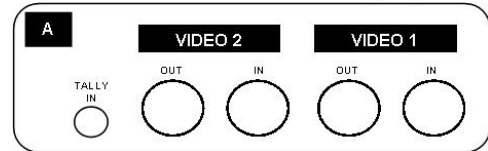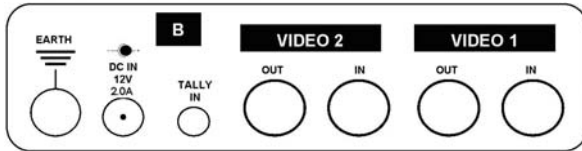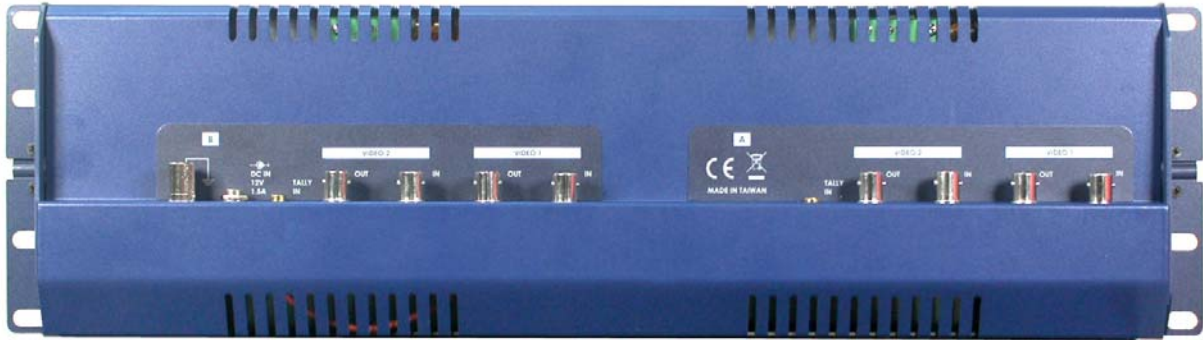

EARTH



The earth terminal can be used with other equipment that has the same feature. Connect all items together to ensure that they are grounded.

DC IN
12V
2.0A



Connect the supplied switch mode power supply to this socket. The locking collar screws into place once the plug has been inserted. It is also possible to power the TLM-702 from other regulated 12V supplies (min 1.5A).

TALLY
IN



3.5mm Jack Socket for tally light connection. You can connect the tally feed from the Datavideo SE 500, RMC-140, RMC90 or other similar equipment.

VIDEO 1

OUT



IN



Each monitor has two composite video inputs, each with a loop-through output. The video input can be PAL or NTSC, the TLM-702 will automatically detect the video standard.

Specifications

- LCD Display 7" x 2 TFT LCD active matrix, resolution 1440 x 234 dots
- Aspect Ratio 4:3 and 16:9 selectable
- Brightness (Luminance) 500 cd/m²
- Contrast Ratio 300
- View Angle
Top: 40 deg
Bottom: 60 deg
Left: 60 deg
Right: 60 deg
- Video Input CV input 1.0Vp-p, with self Loop-Through output
(75 Ohm-terminated)
- Video System NTSC/PAL auto recognition
- Color Adjustment Brightness, Contrast, Color, Tint (Tint is NTSC only)
- Tally Indication Two Color Tally LED indicators
- Operation condition Operation temperature from 0°C to 50°C, RH less than 90%
- Power Consumption DC12Volt, 2.0Amp
- Dimension of LCD Panel 484mm x 133mm x 50mm (W x H x D)

Service and Support

It is our goal to make your products ownership a satisfying experience. Our support team is available to assist you in setting up and operating your system. Please refer to our web site www.datavideo-tek.com for answers to common questions, support requests or contact your local office below.

Datavideo Corporation (USA)

12300-U East Washington Blvd., Whittier, CA 90606 USA

Tel: +1 562 696 2324 contactus@datavideo.us www.datavideo.us

Datavideo Technologies Europe BV

Californiedreef 263565 BL Utrecht, The Netherlands

Tel: +31 30 261 9656 info@datavideo.nl www.datavideo.info

Datavideo UK Limited

Unit 2 Waterside Business Park, Hadfield, Glossop, Derbyshire SK13 1BE UK

Tel: +44 1457 851000 sales@datavideo.co.uk www.datavideo.info

Datavideo Technologies Co., Ltd.

10F, 176 Jian-Yi Rd, Chung Ho City, Taipei Hsien, Taiwan 235

Tel: +886 2 8227 2888 info@datavideo.com.tw www.datavideo.com.tw

Datavideo Technologies China Co.

2F-D, 2 Lane 777, West Guangzhong Rd, Zhabei District, Shanghai, China

Tel: +86 21 5603 6599 service@datavideo.cn www.datavideo.cn

Datavideo Technologies (S) PTE Ltd.

No. 100, Lorong 23 Geylong, #01-03 D'Centennial Bldg, Singapore 388398

Tel: +65 6749 6866 info@datavideo.sg www.datavideo.info

Datavideo Hong Kong Ltd.

G/F., 26 CROSS LANE, WANCHAI, HK

Tel: +9485 3222 leon@datavideohk.com www.datavideohk.com